


Träindustri / Profilmantling/Abra väljer ABRA Import Adhesives

LIMTYP	MATERIAL	PRODUKT
EVA APAO LMPP PU	Pappersfolie	DuraPro® M987 DuraPro® M975 DuraPro® M334 & M351 DuraPur® UH6117
APAO LMPP PU EVA	Fanér för mantling	DuraPro® M975 DuraPro® M334 & M351 DuraPur® UH6117 DuraPro® M973
APAO PU EVA	Plastfolie	DuraPro® M975 DuraPur® UH6111 DuraPro® M794
PU APAO	Högglossfolie	DuraPur® UH6387 DuraPro® M975
PU APAO LMPP	Laminat CPL	DuraPur® UH6119 DuraPro® M975 DuraPro® M334 & M351
PU	Laminat/Aluminium	DuraPur® UH6118
PU	Brandklassade	DuraPur® UH Special Kontakta Abra.

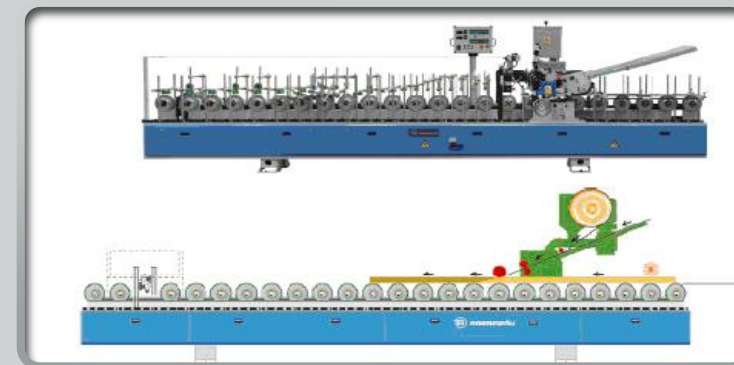

Träindustri / Profilmantling

ABRA Import Adhesives

Lim	Typ	Viskositet	Öppen tid Sekunder	Lägsta Maskinhastighet
M794	EVA	5 500@200°C	9-12	10 m/min
M973	EVA	60 000@200°C	10-13	10 m/min
M975	APAO	10 000@200°C	9-12	18 m/min
M987	EVA	7 000@200°C	10-14	10 m/min
M36CH	EVA	10 000@200°C		>10 m/min
M334	LDPP	9 500@175°C	Medel/Lång	Allround
M351	LDPP	7 000@200°C	Medel/Lång	Allround
D35OL	EVA	5 500@200°C		12 m/min
M2528	EVA	13 000@200°C		15 m/min
M37	APAO	15 750@200°C		>15 m/min
M39	LMPP	9 700@200°C	Medel/Lång	>18 m/min
UH6111	PU	40 000@140°C	10-15	8 m/min
UH6117	PU	40 000@140°C	7-10	15 m/min
UH6118	PU	40 000@120°C	Svag PS	15 m/min
UH6119	PU	35 000@120°C	5	20 m/min
UH6387	PU	15 000@120°C	10	15 m/min

